


Verti-Drain® 1513

The lightweight Verti-Drain® 1513 can work to a depth of 6" / 150mm and is well suited to sensitive turf surfaces. The belt driven machine operates a high speed while giving a neat and consistent hole pattern. An optional rear roller can be added to smooth the surface and leave a neat finish.

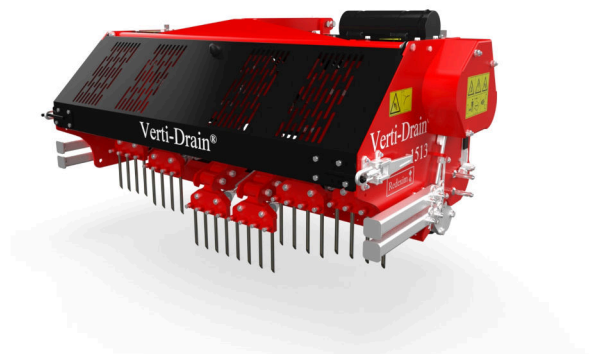

Specifications	
SKU	111.215.013
Working width (m)	1.32
Working width (inch)	52
Max. Working depth (mm)	150
Max. Working depth (inch)	6
Working speed at hole spacing 65 mm	2.12
Working speed at hole spacing 2-1 2 inch (mph)	1.3
Weight (kg)	448
Weight (lbs)	985
Hole distance with 12 mm tines (mm)	55
Hole distance with 1 2 x 6 inch tines (inch)	2.17
Hole spacing distance driving direction (mm)	25 - 125
Hole spacing distance driving direction (inch)	1-7.5
Max diameter solid tine (mm)	12 x 150
Max diameter solid tine (inch)	1/2 x 6
Max diameter hollow tine (mm)	19 x 150
Max diameter hollow tine (inch)	3/4 x 6
Min. Tractor HP required	25
Max. capacity with spacing 65 mm (m ² hr)	2822
Max. capacity with spacing 2-1 2 inch (ft ² hr)	30374
Three-point hitch	3-point CAT 1
Rpm Max.	540
Gearbox oil	80W90 - 0.9L
Lubricant	EP 2
Dimensions (width mm)	970
Dimensions (height mm)	780
Dimensions (length mm)	1610
Dimensions (width inch)	38.2
Dimensions (height inch)	30.7
Dimensions (length inch)	63.4
Min. lifting capacity 610mm behind the lifting eyes (kg)	500
Min. lifting capacity 610mm behind the lifting eyes (lbs)	1102
Working speed at hole spacing 65 mm (km h)	2.12
Working speed at hole spacing 2 1 2 inch (mph)	1.3
Max. Diameter solid tine (mm)	12 x 150
Max. Diameter solid tine (inch)	1/2 x 6
Max. Diameter hollow tine (mm)	19 x 150