


Verti-Drain® 7215

The Verti-Drain® 7215 is well suited to lower HP tractors, the compact yet capable allows for aeration to a depth of 25cm / 10" on the more sensitive of turf areas. The 7215 is particularly popular on golf tees, greens and approaches due to its nimbleness.

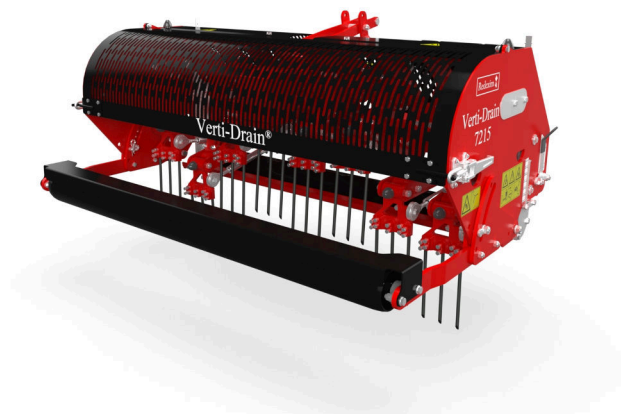

Specifications

SKU	7215
Working width (m)	1.56
Working width (inch)	61
Max. Working depth (mm)	250
Max. Working depth (inch)	10
Working speed at hole spacing 65 mm	1
Weight (kg)	550
Weight (lbs)	1210
Hole distance with 12 mm tines (mm)	65
Hole distance with 1 2 x 6 inch tines (inch)	2.5
Hole distance with 18 mm tines (mm)	100
Hole distance with 3 4 x 9 inch tines (inch)	4
Hole spacing distance driving direction (mm)	25 - 165
Hole spacing distance driving direction (inch)	1 - 6-1/2
Max diameter solid tine (mm)	18 x 250
Max diameter solid tine (inch)	3/4 x 10
Max diameter hollow tine (mm)	25 x 250
Max diameter hollow tine (inch)	1 x 10
Min. Tractor HP required	25
Min. lifting capacity (kg)	700
Min. lifting capacity (LBS)	1540
Max. capacity with spacing 65 mm (m ² hr)	1560
Max. capacity with spacing 2-1 2 inch (ft ² hr)	11000
Three-point hitch	3-point CAT 1
Rpm Max.	500
Gear case oil	80W90
Lubricant	EP 2
Slip clutch setting	400 Nm
Working speed at hole spacing 65 mm (km h)	1
Max. Diameter solid tine (mm)	18 x 250
Max. Diameter solid tine (inch)	3/4 x 10
Max. Diameter hollow tine (mm)	25 x 250
Max. Diameter hollow tine (inch)	1 x 10
Max. capacity with spacing 2 1 2 inch (ft ² hr)	11000